




UNITED WORLD INDUSTRIES, INC.
UNITED WORLD INDUSTRIES, INC.



REGISTERED TRADEMARK IN THE USA & CHINA

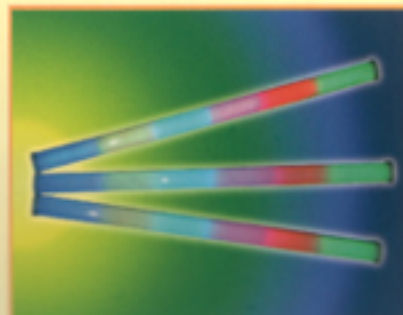



UNITED WORLD INDUSTRIES, INC.



INTRODUCTION

United World Industries, Inc. (UWI), is an American Company specializing in import from Asian and Chinese sources. We are an equity partner with a consortium of Chinese factories that are among the world's lowest cost producers for imported metal and lighting products. We control the production of customer specified metal components and lighting products from tooling and samples until the final delivery of the finished products.

In addition to our imported metal and light products, we offer a variety of other products from Chinese sources. We provide superior import management services for all of our imported products.

UWI is a specialist at sourcing your exporting need as well. There is great potential for developing businesses with China and the Pacific Rim. Our service includes complete import and export management!

If you are looking for metal components, lighting products and other products from reliable Chinese sources, if you want to expand your import or export business, please contact us at UWI.


We have registered trademark of BLUE STAR in the US and China. Which stands for the highest quality, customized designs, guaranteed service, the best value, and is the trusted choice of your import and export sources.



ROPE LIGHT



ROUND ROPE LIGHT SERIES




Rope Light Series (Lighting Emitting Diode)



advantages:


1. LED is the power sources of low heat consumption. It is virtually no heat.
2. LED is power saving and of low energy consumption.
3. LED is of long last life over 100000 hours.
4. LED offers strong visibility, gentle and clear effect.
5. LED is safe. It is the ideal replacement of traditional bulb.
6. LED offers strong brightness. It is without frequent flash and shockproof.
7. LED is the Green Illumination.

Available in Red, Yellow, Green, Blue, White, Orange, purple and Pink.
All Round LED Rope Light Are Available In 12V, 24V, 120V, 230V, Voltage.

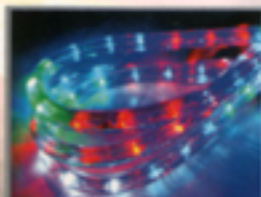

LED-XD-4W (4 wires LED round rope light)

Item No.	Length(m)	Section Diameter (mm)	Bulk Qty(Pack)	Voltage(V)	Bulk Length(M)	Bulk Diameter (mm)	Weight(Kg/M)
LED-XD-4W-100W	100	14	3450	12V/24V	10000	14	0.3

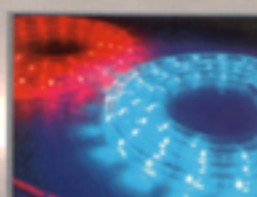

LED-MI-2W (2 wires LED Mini round rope light)

Item No.	Length(m)	Section Diameter (mm)	Bulk Qty(Pack)	Voltage(V)	Bulk Length(M)	Bulk Diameter (mm)	Weight(Kg/M)
LED-MI-2W-100W	100	14	272	12V/24V	10000	14	0.3


LED-XD-2W (2 wires LED round rope light)

Item No.	Length(m)	Section Diameter (mm)	Bulk Qty(Pack)	Voltage(V)	Bulk Length(M)	Bulk Diameter (mm)	Weight(Kg/M)
LED-XD-2W-100W	100	14	272	12V/24V	10000	14	0.3



LED-XU-5W (5 wires LED round rope light)

Item No.	Length(m)	Section Diameter (mm)	Bulk Qty(Pack)	Voltage(V)	Bulk Length(M)	Bulk Diameter (mm)	Weight(Kg/M)
LED-XU-5W-100W	100	14	3450	12V/24V	10000	14	0.3

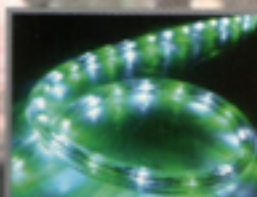

LED-3W-3W (3 wires LED round rope light)


Item No.	Length(m)	Section Diameter (mm)	Bulk Qty(Pack)	Voltage(V)	Bulk Length(M)	Bulk Diameter (mm)	Weight(Kg/M)
LED-3W-3W-100W	100	14	272	12V/24V/230V/220V	10000	14	0.3



UNITED WORLD INDUSTRIES, INC.



ROPE LIGHT




ETL APPROVED

SQUARE ROPE LIGHT SERIES



LED ROPE LIGHTS FLEXIBLE



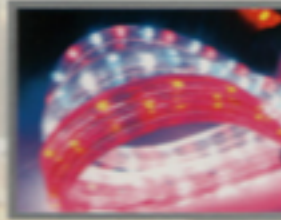


LED-XF-2W(2 wires LED square rope light)

Item No.	Length(m)	Section Diameter (mm)	Bulk Qty(Pcs)	Voltage(V)	Bulk LxWxH(mm)	Bulk weight (kg)	Bulk diameter (mm)	Warranty (yr)
LED-XF-2W	100	12.5x12.5	2400/1000	220V~120V	10000	25-37.5	12.5	3.0

3 Wires LED SQUARE ROPE LIGHT

Item No.	Length(m)	Section Diameter (mm)	Bulk Qty(Pcs)	Bulk LxWxH(mm)	Bulk weight (kg)	Bulk diameter (mm)	Warranty (yr)
LED-XF-3W	100	12.5x12.5	2400	10000	27.7	12.5x12.5x12.5	3.0

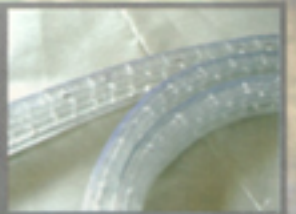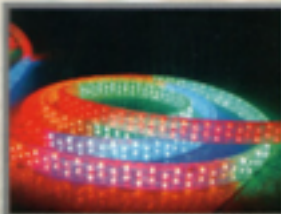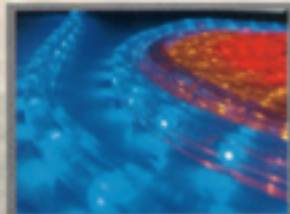

LED-XF-4W(4 wires LED square rope light)


Item No.	Length(m)	Section Diameter (mm)	Bulk Qty(Pcs)	Voltage(V)	Bulk LxWxH(mm)	Bulk weight (kg)	Bulk diameter (mm)	Warranty (yr)
LED-XF-4W	50	12.5x12.5	1400	~220V~120V	10000	27.7	12.5	3.0

LED-XF-5W(5 wires LED square rope light)

Item No.	Length(m)	Section Diameter (mm)	Bulk Qty(Pcs)	Bulk LxWxH(mm)	Bulk weight (kg)	Bulk diameter (mm)	Warranty (yr)
LED-XF-5W	50	12.5x12.5	700	10000	27.7	12.5x12.5x12.5	3.0



WITEC WORLD INDUSTRIES, INC.

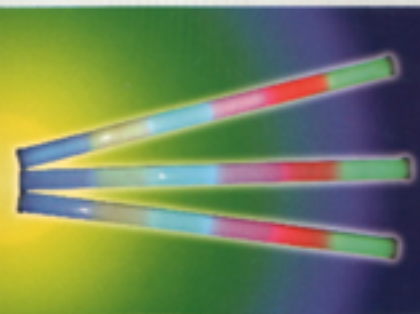

LED

Discoloration
Bulb(Series MXL)

LED semiconductor application-LED Digital Lampstandard(Series MXB)

Using the computerizable controller, the LED Digital Lampstandard could produce the tender and colorful effect. It is completely safe, and it is free of maintenance, low power consumption, waterproof design, wide range of working voltage, various patterns, free of ultraviolet and long lasting life. It is easy to install. It is special use in the walking street, square lighting, garden, villa, scenery spot, ancient gardens, bar, night club, disco hall and other entertainment facilities.

Technical Parameter

1. Working Voltage Range: 110V-240VAC
2. Shell: Ivory PC plastic
3. Basic Wattage: <22W
4. Max.Temperature: -40° - +75°
5. LED Lifespan: 100000HRS
6. Protection Grade: IP65
7. Frequency: 50Hz
8. Diameter: including $\varnothing 80\text{mm}$ $\varnothing 110\text{mm}$ $\varnothing 165\text{mm}$ $\varnothing 200\text{mm}$ $\varnothing 800\text{mm}$
9. Color Range: 2-15 color
10. Color Temperature: RGB continuous color-changing spectrum

Special Digital controller:MXB-3

1. Working Voltage Range: 110V-240VAC
2. Working Frequency: 50Hz
4. Temperature Range: -40° - +75°
5. Function Variation: automatically changing from 2 color to 15 color, and automatically regulating speed at the same time.



Features:

1. Long-lasting life, shock proof and energy-saving (energy consumption is less than one fifth of that of traditional bulb).
The maximum wattage is below 1.1W.
2. Life can reach 100000 hours within working voltage of 160V-260V AC.
3. As it is safe ,free from infrared light and ultraviolet light, of cold source, no heat,
frequent flash or environment pollution, so it is real green illumination.
4. It is colorful with chasing effect of over 15 colors.
5. Having a mini computer chip inside, it is automatically programmed and digitally controlled.
6. With E27 lampholders, it is easy to use, the same way as traditional bulbs.

It is widely used in city street, window display, walking street light, garden lamp, all kinds of indoor art lights and lamps and places as theatre stages and hotels etc.





UNITED WORLD INDUSTRIES, INC.



LED PC Fence Protect Light



LED PC Fence Protect Light



Technical Parameter:

Item No.	Name	Voltage(V)	Size(mm)	Effect
XCL-LED-50	Round Fence Protect Light	230	50X1000	1. ever lighting in Red, Yellow, Blue, Green, White, Orange, Yellowish green or chasing after another 2. changing from Red, Yellow, Orange 3. changing from Red, Green, Purple 4. changing from Red, Green, Yellow 5. changing from Yellow, Blue, White 6. changing from Red, Green, Blue, Yellow, Purple, Yellowish White 7. changing from Red, Yellow, Blue, Orange, Purple, white, Pink
XCL-LED-80	Round Fence Protect Light	230	80X1200	
XCL-LED-110	Round Fence Protect Light	230	110X1200	
XBL-LED-30	Half-circle Fence Protect Light	230	30X1000	
XBL-LED-50	Half-circle Fence Protect Light	230	50X1000	
XBL-LED-80	Half-circle Fence Protect Light	230	80X1200	
XBL-LED-110	Half-circle Fence Protect Light	230	110X1200	
XUL-LED-50X50	U Shape Fence Protect Light	230	50X50X1000	Special computer program for double Fence Protect Light
XC-403	Controller	230		

The fence Protect Light is composed of PC tube of different color, LED diode, digital controller etc., which produces a brand new light source (color source) and shows the chasing and glimmering effect. As it either possesses the softness of daylight lamp or having the activeness of the neon lamp, it becomes the new application and development of electricity technology. The light is great for lighting in crossroads, river protective railing, garden, building exterior etc.

Technical Parameter:

1. Shell: Red, Orange, Yellow, Green, White, Blue, Purple
2. Parameter of the fence shell: A: waterproof, B: dustproof, C: Ultraviolet ray protection
3. Performance: Pressing Resistant, Crash resisting, High and low temperature resistant, fire resistant, shockproof and aging-durable
4. Material: PC Plastic
5. Outer Shell is sealed and waterproof and is up to the dustproof standard IP65
6. Working Voltage: 24V-240VAC
7. Lifespan: 100000 hours
8. Basic wattage: 8.8 W/pc for the light in Red, Yellow, Orange, Yellowish Green 13.2 W/pc for the light in Green, Blue, White, Purple
9. Frequency: 50Hz
10. Max. Working temperature: -40°C — $+75^{\circ}\text{C}$
11. Regulations: IEC 924/929/598



LED-MR16

colored, green, yellow,
blue, clear, multi color



ULW Industries Inc. 2400017421N, 2400



ETL APPROVED



Light strings Advantages

- Up to 90% energy saved
- Average rated lifetime 100,000 hours
- Cool to touch
- Low working voltage
- Rugged, not easy to break
- Easy and flexible installation
- Ready to be extended for 30 strings longer length
- Replaceable freely
- CSA, CE and UL approved

Wire: AWG#18 for outdoor (CSA)

AWG #20 for indoor and outdoor (UL)

AWG #20 for indoor (CSA)

Plug and end connector: two-wire, non-polarized

Ambient operating temperature: -40°C ~ +75°C

WARAANTY

Our LED light string product has a two year limited warranty from the date of purchase. For the period of two years from date of purchase, Fiesineon Lighting manufacturing company warrants the product to be free from defects in material and workmanship. This warranty does not cover product abuse.

HOLIDAY LIGHT STRING SERIES

Product Specifications:

Name: LED String Light

Voltage: AC 120 V, 60 Hz, Wattage: 1.2~6.4W

String length: 174~510(443CM~1296CM)

Ambient operating temperature: -40°C ~ +75°C

For outdoor and indoor use.

★ HOW TO INSTALL LED STRING LIGHT

1. Careful handling is suggested when installing the LED String light, make sure you do not cut or damage the cord insulation.
2. When attaching the mounting clips, use nails or screws for wooden surfaces, and use screw anchors and screws for cement surfaces. Use appropriate clips to mount LED string lights into corners or place edges.
3. Use cable ties to attach LED string lights onto fences, railings, trees or poles.

★ HOW TO EXTEND STRING LIGHT

1. Turn off the power switch, or unplug the LED string light from the power line.
2. Connect the male connector of the extension string to the end female connector of the last LED string. Make sure the connectors are firmly connected and secured.

★ CAUTION

1. Do not exceed the maximum number of extensions.
2. The maximum total number of LED string lights connected together through end connectors is 30 strings. If there are more LED string lights to install, install them in one or more separate groups.
3. All units must be unplugged prior to adding any additional string lights.
4. Make sure all connections are tightly secured.
5. Before replacing a LED bulb, make sure to unplug the LED string. Never turn or twist the bulb, pull it straight out from the lamp-holder. When replacing the new bulb, grasp the lower part of the bulb and press it straight into the lamp-holder and make sure it plug in the right direction and be secured.



STRAWBERRY LIGHTS



Replaceable

NEW

Patent No.



ZL2004200377227.0

ZL2004200377226.6

Item Name	LED Number	Length(m)	Max Ampere(A)	Voltage	Wattage(W)	Indoor/Outdoor	Bulb Space(mm)	Life Time(hrs)
60-LED STRING (M) 2	60	1.74	0.02	AC 120V	1.2~1.6W	Indoor	10mm	100000
60-LED STRING (M) 2	60	1.74	0.02	AC 120V	1.2~1.6W	Indoor	10mm	100000
60-LED STRING (M) 2	60	1.74	0.02	AC 120V	1.2~1.6W	Indoor	10mm	100000
60-LED STRING (M) 2	60	1.74	0.02	AC 120V	1.2~1.6W	Indoor	10mm	100000
60-LED STRING (M) 2	60	1.74	0.02	AC 120V	1.2~1.6W	Indoor	10mm	100000
60-LED STRING (M) 2	60	1.74	0.02	AC 120V	1.2~1.6W	Indoor	10mm	100000
60-LED STRING (M) 2	60	1.74	0.02	AC 120V	1.2~1.6W	Indoor	10mm	100000
60-LED STRING (M) 2	60	1.74	0.02	AC 120V	1.2~1.6W	Indoor	10mm	100000



LED C7, C9 light string





UNITED WORLD INDUSTRIES, INC.



ETL APPROVED



Coconut tree light

Feature; Weaterproof, cold-resistant and anti-wind;
Color range; Red, Green, Yellow, Orange, Blue;
Versatile; Performance wih controller inside



Tree light



F-1 Bee Lamp



F-2 Flower Lamp



F-3 Butterfly Lamp



F-4 Fountain Lamp



F-5 Windmill Lamp



F-6 Electronic Fireworks Lamp

Web: www.uwi-industries.com



WE BRIGHTEN THE WORLD THE WORLD BRIGHTENS US



UNITED WORLD INDUSTRIES, INC.

10915 NW 41st Drive Coral Springs, FL 33065

Tel: 954-509-0822 Fax: 954-346-1589 E-mail: untworld@aol.com Web: www.uwi-industries.com